



MA 281 D/S


GENERAL TECHNICAL CHARACTERISTICS

Structure: enamelled steel, opened firebox
 Fire box: In AluKer®
 Fire pit: in cast iron
 Hood: in steel
 Flue outlet top
 Flue damper: manual
 Ash pan: removable
 Fuel: wood
 Heating: radiant and natural convection

TECHNICAL DATA

Room heating capacity (m In-max)	m ²	120 - 200
Nominal thermal efficiency	%	51 (57**)
Rated heat output	KW	7
Consumption at rated heat output	Kg/h	3,2 (3,0**)
Flue outlet	Ø cm	25
Flue up to 4,5 mt	Ø cm	30
Flue over 4,5 mt	Ø cm	25
Fresh air intake (recomm. m In sect.)	cm ²	300
Weight	Kg	140 (160**)

TECHNICAL DRAWING

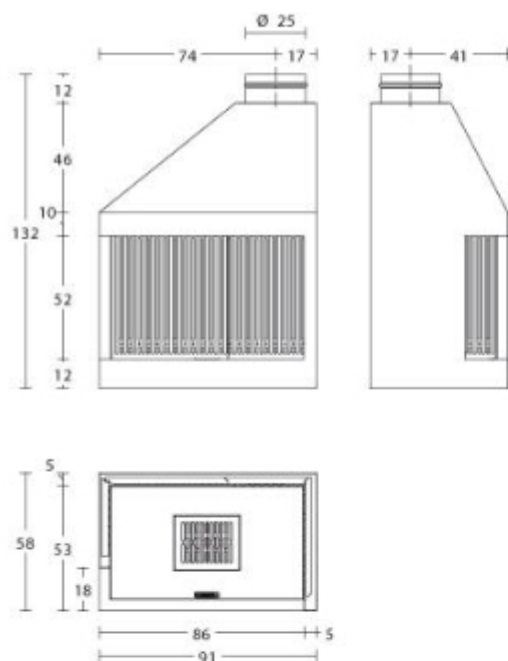

ON REQUEST

- Cooking Pro kit
- Glass door kit

Laboratory data using beech wood with less than 20% moisture content. Consumptions may vary according to the type of wood used



The availability of models may vary from Country to Country.

Full technical data available in pdf



DoP product



DoP product



DoP Metal Connecting Flue Pipes



DoP Metal Connecting Flue Pipes

Compatible Cover

BOLZANO - FAENZA - VIAREGGIO - MAREMMA - OLBIA - SESTRIERE